
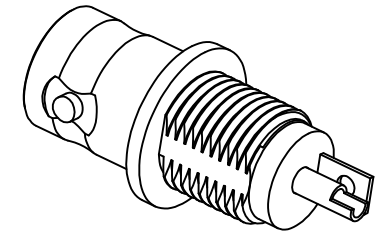
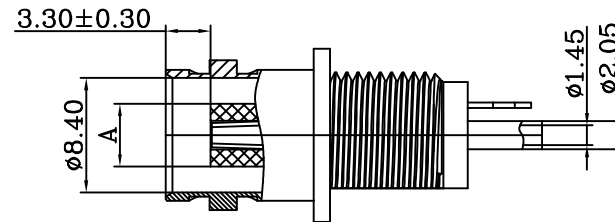
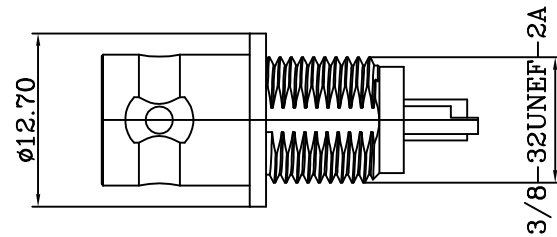





REVISIONS

RevNo	Description	Date	Revision	Mender
1	更改公差22.20改为22.20±0.50; 8.50 ⁺⁰ _{-0.15} 改为8.50	2012-5-31	A2	Bzw
2				

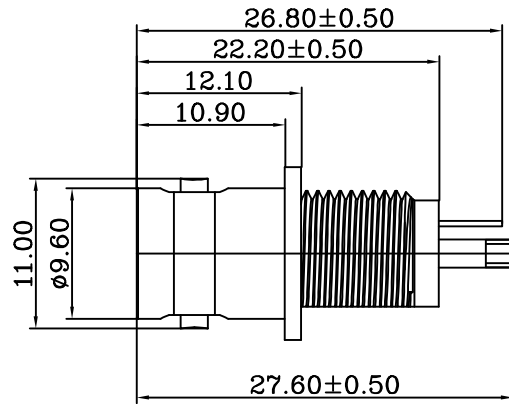

MODEL NO.	A	DRAWING NO.
SB126/P/Zn/50 Ohm	4.60	
SB126/P/Zn/75 Ohm	3.00	

ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED
8	NUT	ZINC	1	NICKEL PLATED
7	LOCK WASHER	IRON	1	NICKEL PLATED
6	INSULATOR	ABS	1	WHITE
5	WASHER	IRON	1	NICKEL PLATED
4	GROUNDING CONTACT	BRASS	1	NICKEL PLATED
3	CENTER CONTACT	P-Bronze	1	GOLD PLATED
2	INSULATOR	ABS	1	WHITE
1	BODY	ZINC	1	NICKEL PLATED

				TITLE			
				BNC FEMALE ISOLATED FROM PANEL WITH MOLDED THERMO PLASTIC INSULATION			
成品图		UNITS	MM	UNLESS OTHERWISE SPECIFIED		DESIGNED	<i>Xwj</i>
PART NO.		SCALE	FIT	TOLERANCES:		DRAWING	<i>Xwj</i>
MODEL NO.	SB126/P/Zn			0.5-15 = ±0.15		CHECKED	<i>David</i>
DRAWING NO.		EDITION	A1	15-30 = ±0.30		APPROVED	<i>Andy</i>
CAD FILE	Yin sheng/Yifaxing/SB/SB126			30-120 = ±0.60		2006/09/02 3RD ANGLE	
				>120 = ±1.00			